


LCD46WPC-7G

Wallmount Vers.2



- Projected Capacitive Touchscreen
- Optional IP65 all around (waterproof)

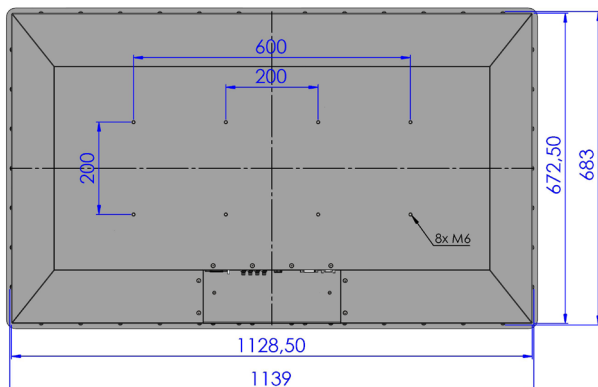

Specifications

LCD Panel

Display Type	46" TFT LCD
Resolution	1920 x 1080
Colors	16.7M
Brightness	500cd/m ² (typ.)
<i>option</i>	Sunlight readable (>800cd/m ²)
Viewing Angle	178° H, 178° V (typ.)

Interface

VGA Input	HD-Sub 15pin, DVI
<i>option</i>	HDMI®, DisplayPort™
<i>option</i>	Video Input - Composite, S-Video, PAL/NTSC, SDI
OSD Control	Brightness, Contrast, Phase, Size, Sharpness, Auto Adjust, etc.

Mechanical

Construction	Powder coated aluminum front panel with recessed protection glass and PCAP touch screen, powder coated steel chassis
Color	RAL 9005, 7035, 7032, 9006, etc.
Front Dimension	1151 x 695 x 10mm
Cover Dimension	1128,5 x 672,5 x 109mm (w/o screws)
Mounting	VESA 600 x 200mm (8 x M6)

Electrical

Power Supply	115/230V AC, 50/60Hz
<i>option</i>	24V, 48V DC

Environmental

Temperature	Storage -20°C to 60°C Operating 0°C to 45°C
Humidity	max. 90% RH, non condensing

Options

Control	Infrared
Audio	2 x loudspeaker
Waterproof	IP65 all around
Wide Temperature	Operating -20°C to 45°C
AC adapter	
other options on request	

Accessories (included)

Power-cord
VGA-cable
DVI-cable

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Dimensions in mm

8K

All rights reserved. Specifications subject to change without prior notice