


Display + Interface + Kabel

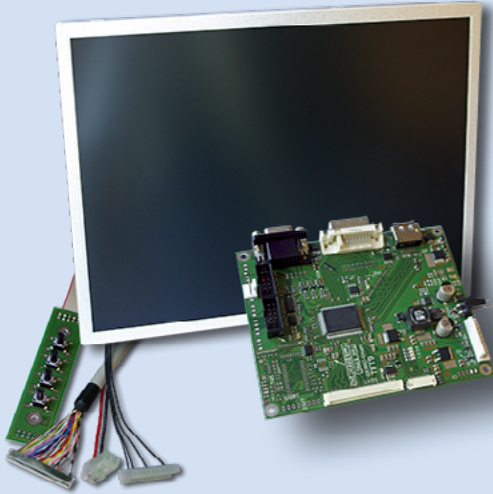


Beschreibung:

- For easy plug+display connections of flatpanels to DVI- and analog-RGB sources from VGA up to UXGA (1600x1200)
- Video (PAL/NTSC/[SECAM]), optional SDI
- Output for TTL and LVDS Displays up to SXGA (1280x1024)
- Color depths up to 24bits
- Highest picture quality by improved scaling algorithm
- Simply Flatpanel configuration via jumper (no external software)
- Single 12V power supply
- Optional Touch-Controller for resistive Touch (4, 8 bit)

Durch unsere eigene Entwicklung und Fertigung sind kundenspezifische Änderungen ab 1 Stk. nach Absprache möglich. Preise auf Anfrage.

Technische Daten:

- One product for different resolution up to UXGA (1600 x1200)
- Color depths up to 24bits
- analog-RGB: 15pin VGA-Connector, 10pin IDC
- DVI: DVI-Anschluß, 16pin IDC
- Video: FBAS (max. 6), Y/C (max. 2)
- Optional SDI
- Advanced Scaling, horizontal/vertical zoom and shrink
- Adjustable Picture-Size
- On-Screen Display, 4-button user interface, OSD control for all features
- Optional IR-Remote
- High power connector for power supply and backlight converter
- Cable-Kits for flatpanels
- Backlight dimming
- I/O-Ports (max. 8) and 4-button for special use
- Optional Touch-Controller für resistiven Touch (4, 8 bit), RS232
- Power supply: only 12V= +/- 10%
- Operating Temp. -10°C to +60°C
- Storage Temp. von -20°C to +60°C
- Ambient Humidity 10 – 90 %RH
- Storage Humidity 10 – 90 %RH

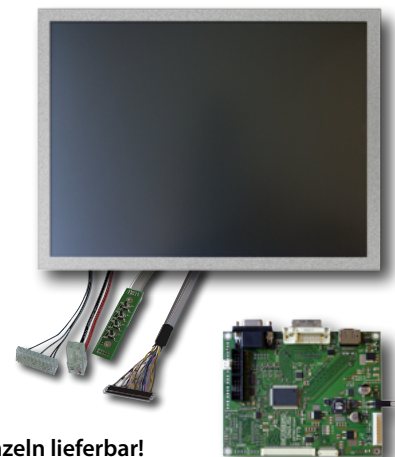

Auch einzeln lieferbar!