
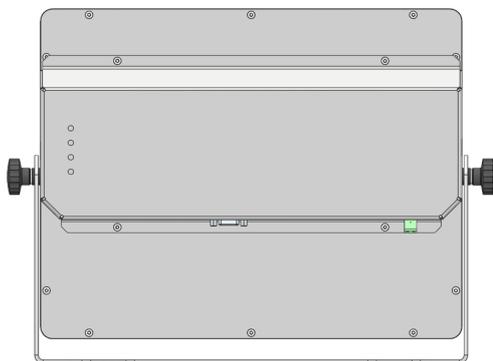


## LCD15DMI-5I

desktop indoor standard slimline

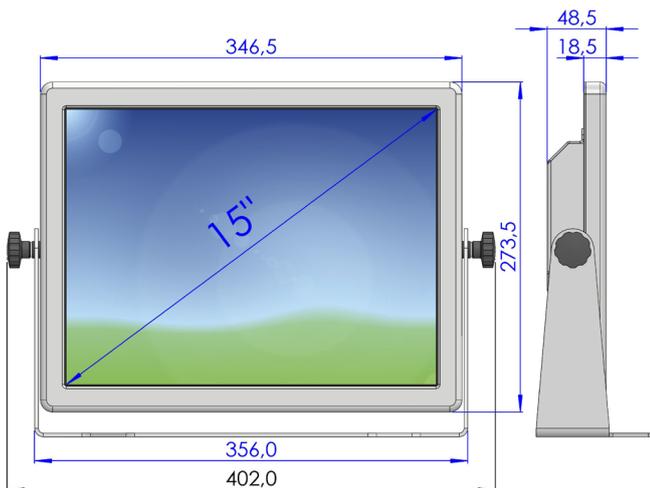

## Specifications

### LCD-panel

display type	15" TFT LCD
resolution	1024 x 768 (XGA)
colors	16.2 million
brightness	500cd/m <sup>2</sup> (typ.)
viewing angle	176° H, 176° V (typ.)

### environmental

temperature	operating 0°C to 45°C storage -20°C to +60°C
IP code	IP65 on frontside IP21 on backside

### mechanical

construction	aluminium chassis, powder coated
protection glass	3mm glass pane with chemical antiglare treatment
colors	RAL 9005, 9006, 7035
mounting	standard mounting bracket

### LCD-controller

data input	DVI DisplayPort™ HDMI®
OSD control	brightness, contrast, phase, size, sharpness, auto adjust, etc

### power supply

24V DC

### options

colors	RAL-Colors
protection glass	<b>tempered glass</b> <b>acrylic glass</b> <b>polycarbonate glass</b>
mounting	custom mounting solutions
data input	<b>add'l. DisplayPort™, HDMI®</b> <b>DVI, VGA, SDI, S-video</b> <b>composite-video (PAL/NTSC)</b>
HDMI extender	Image data transmission via Cat 5e/ Cat 6 cable, up to 100m
power supply	<b>12V, 48V DC</b> <b>110/230V AC, 50/60Hz</b>

*more options on request*

The Adopted Trademarks HDMI®, High-Definition Multimedia Interface, and the HDMI® Logo are trademarks or registered trademarks of HDMI® Licensing Administrator, Inc. DisplayPort™ and the Display-Port™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

dimensions in mm

6B

All rights reserved. Specifications subject to change without prior notice

