

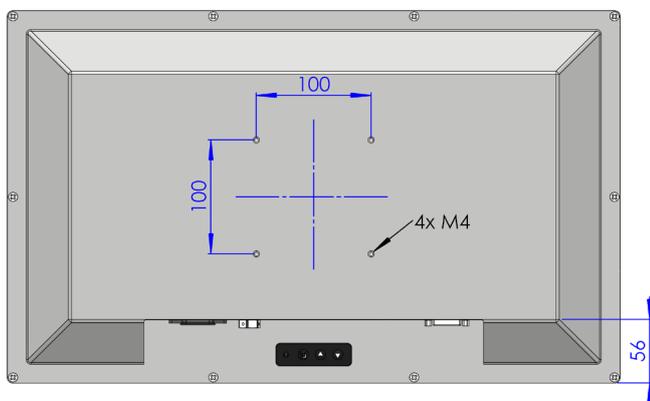


LCD21WDML -6B

desktop outdoor rugged L

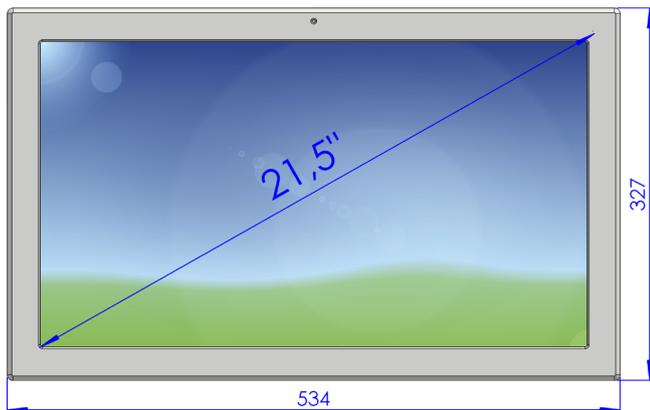

- IP65 all around
- optional *high brightness* (1500 cd/m²)
- optional *wide temperature* (-30°C to 50°C)

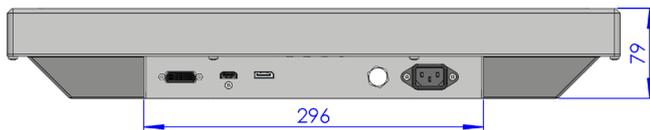

Specifications

LCD-panel

display type	21.5" TFT LCD
resolution	1920 x 1080 (Full HD)
colors	16.7 M
brightness	300cd/m ² (typ.)
viewing angle	178° H, 178° V (typ.)

environmental

temperature	operating 0°C to 50°C storage -20°C to +60°C
IP code	IP65 all around

mechanical

construction	aluminium, powder coated
colors	RAL 9005, 9006, 7035
protection glass	3 mm, anti glare
mounting	VESA 100 x 100 mm (4 x M4)

LCD-controller

data input	DVI DisplayPort™ HDMI®
OSD control	brightness, contrast, phase, size, sharpness, auto adjust, etc

power supply

110/230V AC, 50/60Hz

options

brightness	high brightness, up to 1500cd/m ²
temperature	operating -20°C to 50°C operating -30°C to 50°C
colors	RAL-Colors
protection glass	tempered glas laminated safety glass acrylic glass polycarbonate glass
mounting	custom mounting solutions
data input	add'l. DisplayPort™, HDMI® DVI, VGA, SDI, S-video composite-video (PAL/NTSC)
HDMI extender	Image data transmission via Cat 5e/ Cat 6 cable, up to 100m
power supply	24V, 48V DC
miscellaneous	waterproof industrial connectors wall mount sun protection hood speakers

The Adopted Trademarks HDMI®, High-Definition Multimedia Interface, and the HDMI® Logo are trademarks or registered trademarks of HDMI® Licensing Administrator, Inc. DisplayPort™ and the Display-Port™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Dimensions in mm

6B

All rights reserved. Specifications subject to change without prior notice

