



LCD21WDMS-4H

widescreen outdoor slimline

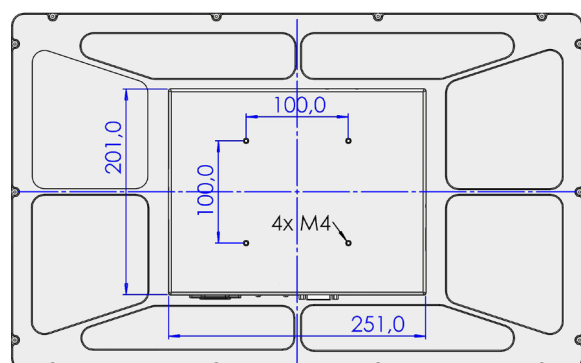

- IP65 rundum

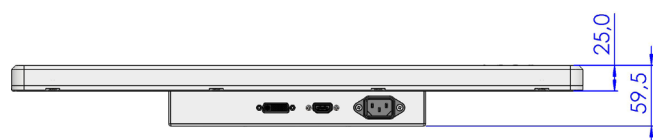

Technische Daten

Display

LCD-Panel	21,5" TFT LCD
Auflösung	1920 x 1080 (FullHD)
Farben	16.7 Millionen
Helligkeit	300 cd/m² (typ.)
Sichtwinkel	178° H, 178° V (typ.)

Umgebung

Betriebstemperatur	0°C bis 45°C
Lagertemperatur	-20°C bis +60°C
Schutzart	IP65 (strahlwasserfest)

Mechanik

Gehäuse	Aluminium, Pulverlack beschichtet
Farben	RAL 9005, 9006, 7035
Schutzglas	Stärke 3 mm, entspiegelt
Montage	VESA 100 x 100 mm (4 x M4)

LCD-Controller

Schnittstellen	DisplayPort™ HDMI®
Menü Einstellung	Backlight, Helligkeit, Kontrast, Phase, Bildgröße, Auto Adjust, etc.

Stromversorgung

110/230V AC, 50/60Hz

Optionen

Farben	RAL-Farben
Schutzglas	ESG, VSG, Vinyl, Polycarbonat
Montage	Sonderbefestigung an Rückwand
Schnittstellen	zus. DisplayPort™, HDMI®, DVI
	Composite-Video, S-Video
	PAL/NTSC, SDI
Stromversorgung	24V, 48V DC
Sonstiges	Wandhalterung

Weitere Optionen auf Anfrage...

The Adopted Trademarks HDMI®, High-Definition Multimedia Interface, and the HDMI® Logo are trademarks or registered trademarks of HDMI® Licensing Administrator, Inc. DisplayPort™ and the Display-Port™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. HDBaseT™ is a trademark of the HDBaseT Alliance.

