



## LCD21WDMS-4H

desktop *slimline*

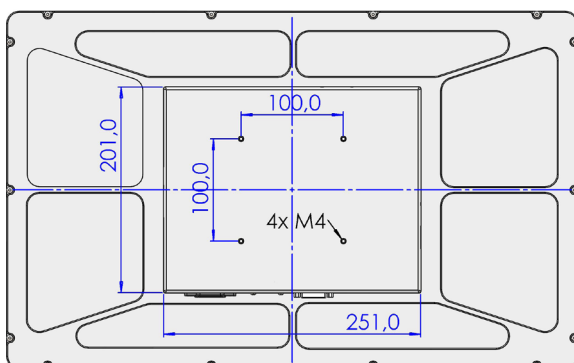

- IP65 all around

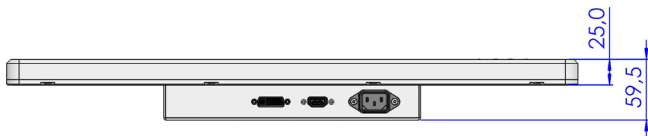

## Specifications

### LCD-panel

display type	21,5" TFT LCD
resolution	1920 x 1080 (Full HD)
colors	16.7 M
brightness	300cd/m <sup>2</sup> (typ.)
viewing angle	178° H, 178° V (typ.)

### environmental

temperature	operating 0°C to 45°C storage -20°C to +60°C
IP code	IP65 all around

### mechanical

construction	aluminium, powder coated
colors	RAL 9005, 9006, 7035
protection glass	3 mm, anti glare
mounting	VESA 100 x 100 mm (4 x M4)

### LCD-controller

data input	DVI <b>DisplayPort™</b> <b>HDMI®</b>
OSD control	brightness, contrast, phase, size, sharpness, auto adjust, etc

### power supply

110/230V AC, 50/60Hz

### options

colors	RAL-Colors
protection glass	<b>tempered glas</b> <b>acrylic glass</b> <b>polycarbonate glass</b>
mounting	custom mounting sollutions
data input	<b>add'l. DisplayPort™, HDMI®</b> <b>DVI, VGA, SDI, S-video</b> <b>composite-video (PAL/NTSC)</b>
HDMI extender	Image data transmission via Cat 5e/ Cat 6 cable, up to 100m
power supply	<b>24V, 48V DC</b>
miscellaneous	waterproof industrial connectors wall mount

The Adopted Trademarks HDMI®, High-Definition Multimedia Interface, and the HDMI® Logo are trademarks or registered trademarks of HDMI® Licensing Administrator, Inc. DisplayPort™ and the Display-Port™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Dimensions in mm

04.2026

All rights reserved. Specifications subject to change without prior notice

