



LCD27WDMS2-5L

desktop standard slimline

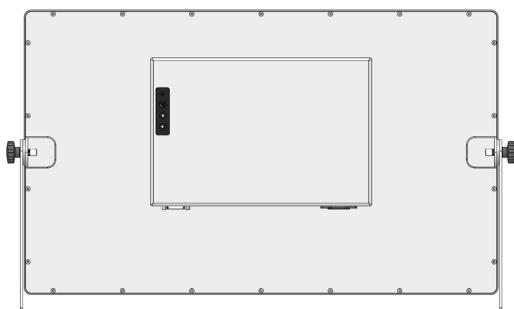

- slim and waterproof
- bracket for table mounting
- adjustable tilt

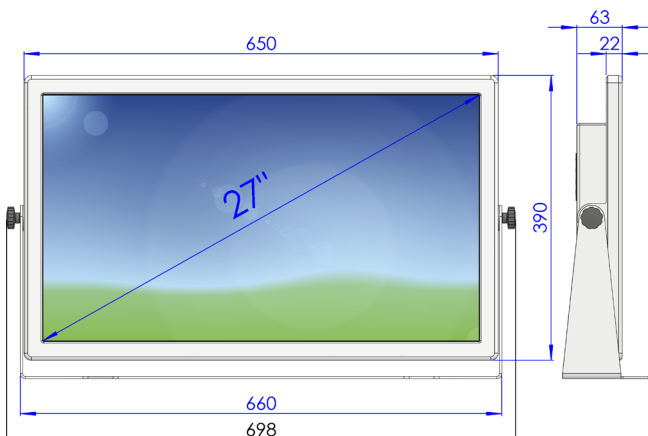

Specifications

LCD-panel

display type	27" TFT LCD
resolution	1920 x 1080 (Full HD)
colors	16.7 million
brightness	350cd/m ² (typ.)
viewing angle	178° H, 178° V (typ.)

environmental

temperature	operating 0°C to 45°C storage -20°C to +60°C
IP code	IP65 all around

mechanical

construction	powder coated aluminium chassis/ bracket
colors	RAL 9005, 9006, 7035
protection glass	3mm glass pane with chemical antiglare treatment
mounting	standard mounting bracket

LCD-controller

data input	DisplayPort™ HDMI® DVI
OSD control	brightness, contrast, phase, size, sharpness, auto adjust, etc

power supply

110/230V AC, 50/60Hz

options

colors	RAL-Colors
protection glass	tempered glass acrylic glass polycarbonate glass
mounting	custom mounting solution
data input	add'l. DisplayPort™, HDMI® DVI, VGA, SDI, S-video composite-video (PAL/NTSC)
HDMI extender	Image data transmission via Cat 5e/ Cat 6 cable, up to 100m
power supply	12V, 24V, 48V DC
miscellaneous	waterproof industrial connectors IR-Remote

more options on request...

The Adopted Trademarks HDMI®, High-Definition Multimedia Interface, and the HDMI® Logo are trademarks or registered trademarks of HDMI® Licensing Administrator, Inc. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

dimensions in mm

04.2026

All rights reserved. Specifications subject to change without prior notice

