

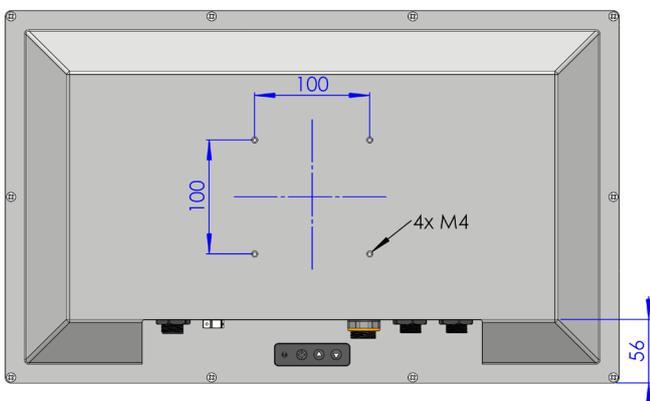


PPC21WDML-6B

desktop outdoor rugged L

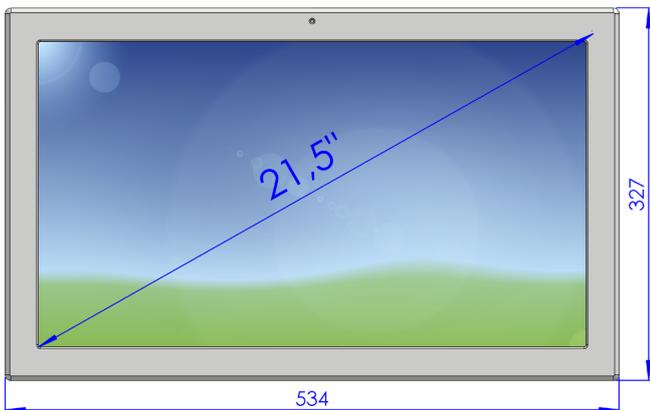

- IP65 all around
- optional *high brightness* (1500 cd/m²)
- optional *wide temperature* (-30°C to 50°C)

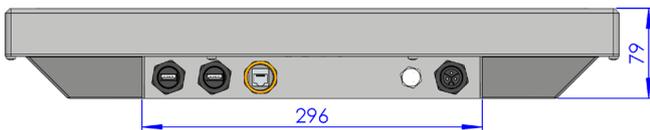

Specifications

LCD-panel

display type	21.5" TFT LCD
resolution	1920 x 1080 (Full HD)
colors	16.7 million
brightness	300cd/m ² (typ.)
viewing angle	178° H, 178° V (typ.)

environmental

temperature	operating 0°C to 50°C storage -20°C to +60°C
IP code	IP65 all around

mechanical

construction	powder coated aluminium chassis
colors	RAL 9005, 9006, 7035
protection glass	3mm glass pane with chemical antiglare treatment
mounting	VESA 100 x 100 mm (4 x M4)

PC

CPU	Intel® Celeron® J6412 (Elkhart Lake)
memory	up to 16GB RAM
storage	solid state disk up to 1TB
I/O-ports	1x G-LAN, 2x USB 2.0

power supply

110/230V AC, 50/60Hz

options

brightness high brightness, up to 1500cd/m²
(with automatic brightness control)

temperature **operating -20°C to 50°C**
operating -30°C to 50°C

colors RAL-Colors

protection glass **tempered glass**
laminated safety glass
acrylic glass
polycarbonate glass

mounting custom mounting solutions

CPU **Intel® Celeron® J6211 (up to 32GB)**
Intel® Pentium® N6415 (up to 32GB)
Intel® Core™ i3, i5, i7 (up to 64GB)

I/O-ports add'l. LAN, USB, RS232 etc.

wireless **802.11ac/ax, 802.11be**

mobile LTE/ 5G

operating system **Microsoft® Windows® 10 ***
Microsoft® Windows® 11 *
Linux®

power supply 24V, 48V DC

miscellaneous **waterproof industrial connectors**
wall mount
sun protection hood
speakers

more options on request...

* IoT Enterprise LTSC

Intel®, Celeron®, Pentium®, Intel® Core™ and Intel® Atom™ are trademarks of the Intel Corporation in the U.S. and other countries. Microsoft® and Windows® are trademarks of the Microsoft® Corporation in the U.S. and other countries. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

dimensions in mm

6C

All rights reserved. Specifications subject to change without prior notice

