


## PPC46WPC-7G

widescreen balanced pcap



- IP65 all around
- optional *high brightness* (2500 cd/m<sup>2</sup>)
- optional *wide temperature* (-20°C to 50°C)

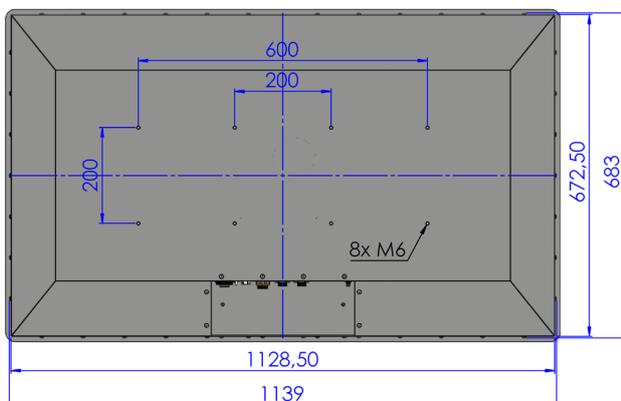

## Specifications

### LCD-panel

display type	46" TFT LCD
resolution	1920 x 1080 (Full HD)
colors	1.07 billion
brightness	700cd/m <sup>2</sup> (typ.)
viewing angle	178° H, 178° V (typ.)

### environmental

temperature	operating 0°C to 50°C storage -20°C to +60°C
IP code	IP65 all around

### mechanical

construction	powder coated aluminium front panel with recessed protection glass and PCAP touchscreen, powder coated steel chassis
colors	RAL 9005, 9006, 7035
mounting	VESA 600 x 200 mm (8 x M6)

### PC

CPU	Intel® Celeron® J6412 (Elkhart Lake)
memory	up to 16GB RAM
storage	solid state disk up to 1TB
I/O-ports	1x G-LAN, 2x USB 2.0 (waterproof industrial connectors)

### power supply

110/230V AC, 50/60Hz

### options

resolution	3840 x 2160 (Ultra HD)
brightness	<b>high brightness, up to 2500cd/m<sup>2</sup></b> (with automatic brightness control)
temperature	operating -20°C to 50°C
colors	<b>RAL-Colors</b>
mounting	custom mounting solutions
CPU	<b>Intel® Celeron® J6211 (up to 32GB)</b> <b>Intel® Pentium® N6415 (up to 32GB)</b> <b>Intel® Core™ i3, i5, i7 (up to 64GB)</b> add'l. LAN, USB, RS232 etc.
I/O-ports	<b>802.11ac/ax, 802.11be</b>
wireless	LTE/ 5G
mobile	
operating system	<b>Microsoft® Windows® 10 *</b> <b>Microsoft® Windows® 11 *</b> <b>Linux®</b>
power supply	24V, 48V DC
miscellaneous	<b>wall mount</b> <b>speakers</b>

*more options on request*

\* IoT Enterprise LTSC

Intel®, Celeron®, Pentium®, Intel® Core™ and Intel® Atom™ are trademarks of the Intel Corporation in the U.S. and other countries. Microsoft® and Windows® are trademarks of the Microsoft® Corporation in the U.S. and other countries. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Dimensions in mm

6B

All rights reserved. Specifications subject to change without prior notice

