



PPC24WDPC-8D

Desktop

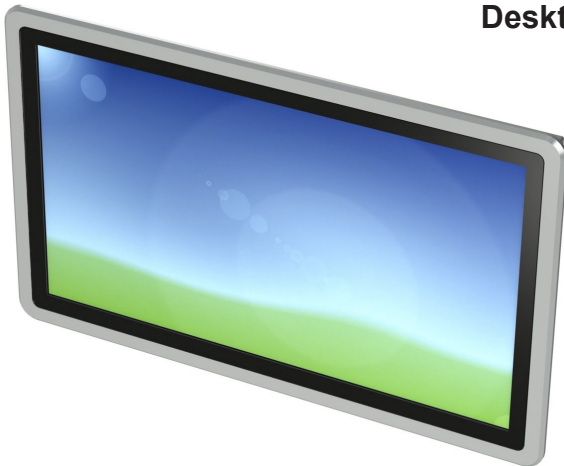

- Projected Capacitive Touchscreen
- IP65 on frontside

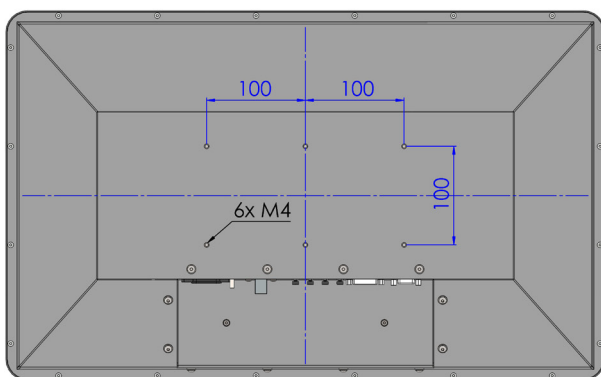

Specifications

LCD Panel

Display Type	24" TFT LCD
Resolution	1920 x 1080
Colors	16.7M
Backlight	LED
Brightness	300cd/m ² (typ.)
Viewing Angle	178° H, 178° V (typ.)

Touchscreen

Projected Capacitive Touchscreen via USB

PC System

Processor/ Memory	Intel® Celeron® J1900, 4x 2.0GHz up to 8GB RAM
<i>option</i>	Intel® Celeron® J4105, 4x 1.5GHz up to 8GB RAM
<i>option</i>	Intel® Core™ i3, i5, i7, 6th/8th Gen. up to 16GB RAM
Storage	Solid State Disk, up to 1TB
<i>option</i>	2,5" HDD, up to 1TB
I/O Port	1 x LAN 2 x USB 2.0 more/ other I/O-Ports on request

Mechanical

Construction	Powder coated aluminum front panel with recessed protection glass and PCAP touch screen, powder coated steel chassis
Color	RAL 9005, 7035, 7032, 9006, etc.
Dimension	607 x 375 x 75mm, (w/o screws)
Mounting	VESA 200 x 100mm (6 x M4)

Electrical

Power Supply	115/230V AC, 50/60Hz
<i>option</i>	12V, 24V DC

Environmental

Temperature	operating 0°C to 50°C storage -20°C to 60°C
Humidity	max. 90% RH, non condensing
Protection	IP65 on frontside

Options

Operating System	Microsoft® Windows® 7 Pro ¹ Microsoft® Windows® 10 Pro Microsoft® Windows® Embedded Linux®
Protection glass	anti glare, IP65 on frontside
WLAN	802.11ac, 802.11a/b/g/n
Waterproof	IP65 all around
Wide Temperature	Operating -20°C to 50°C
AC adapter	other options on request

Accessories (included)

Power-cord

¹ with Intel® Celeron® J1900 processor only

Intel®, Celeron®, Pentium®, Intel® Core™ and Intel® Atom™ are trademarks of the Intel Corporation in the U.S. and other countries. Microsoft® and Windows® are trademarks of the Microsoft® Corporation in the U.S. and other countries. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.